







熱硬化型穴埋めインキ THP-100 Series

Thermal Curable Permanent Hole-Plugging Materials

高信頼性タイプ High reliability type

THP-100 DX7

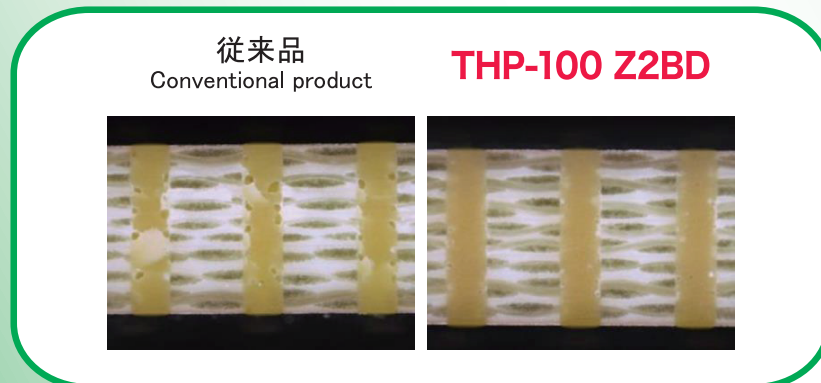
- 高T_g / 低CTE High T_g / Low CTE
- TCT耐性良好 Excellent anti crack resistance at TCT
-65°C⇔150°C / 1000cycle / No crack
- リフロー耐性良好 Excellent anti crack resistance at reflow

	従来品 Conventional product	THP-100 DX7
Before Reflow		
L2a (C-120/60/60)+ Reflow (270°C/5cycles)		

バックドリル対応 For Back-drill type

THP-100 Z2BD

- 保存安定性良好 Very long pot life
- アウトガスによるボイド低減 Excellent for void due to outgas



TAIYO INK MFG. CO., LTD.